


ZR 20

Technical data

Type	i	2800 (min1)				1400 (min1)				900 (min1)				700 (min1)				RD	Kg
		Max.*		Norm.		Max.*		Norm.		Max.*		Norm.		Max.*		Norm.			
		T2m* (Nm)	P1m* (kW)	T2n (Nm)	P1n (kW)	T2m* (Nm)	P1m* (kW)	T2n (Nm)	P1n (kW)	T2m* (Nm)	P1m* (kW)	T2n (Nm)	P1n (kW)	T2m* (Nm)	P1m* (kW)	T2n (Nm)	P1n (kW)		
ZR20	1	20,2	6,5	10	3,0	25,2	3,9	15	2,2	27,1	3,0	15	1,5	29,7	2,0	15,4	1,1	0,97	3,5
	2	19	3,2	10	1,5	17,9	2,8	14,8	1,1	19	2,1	15	0,75	21	1,4	15	0,55	0,97	

Important! * The maximum permissible values are indicated, for a quiet operating mode, with safety clutches and a soft start.

Dimensions

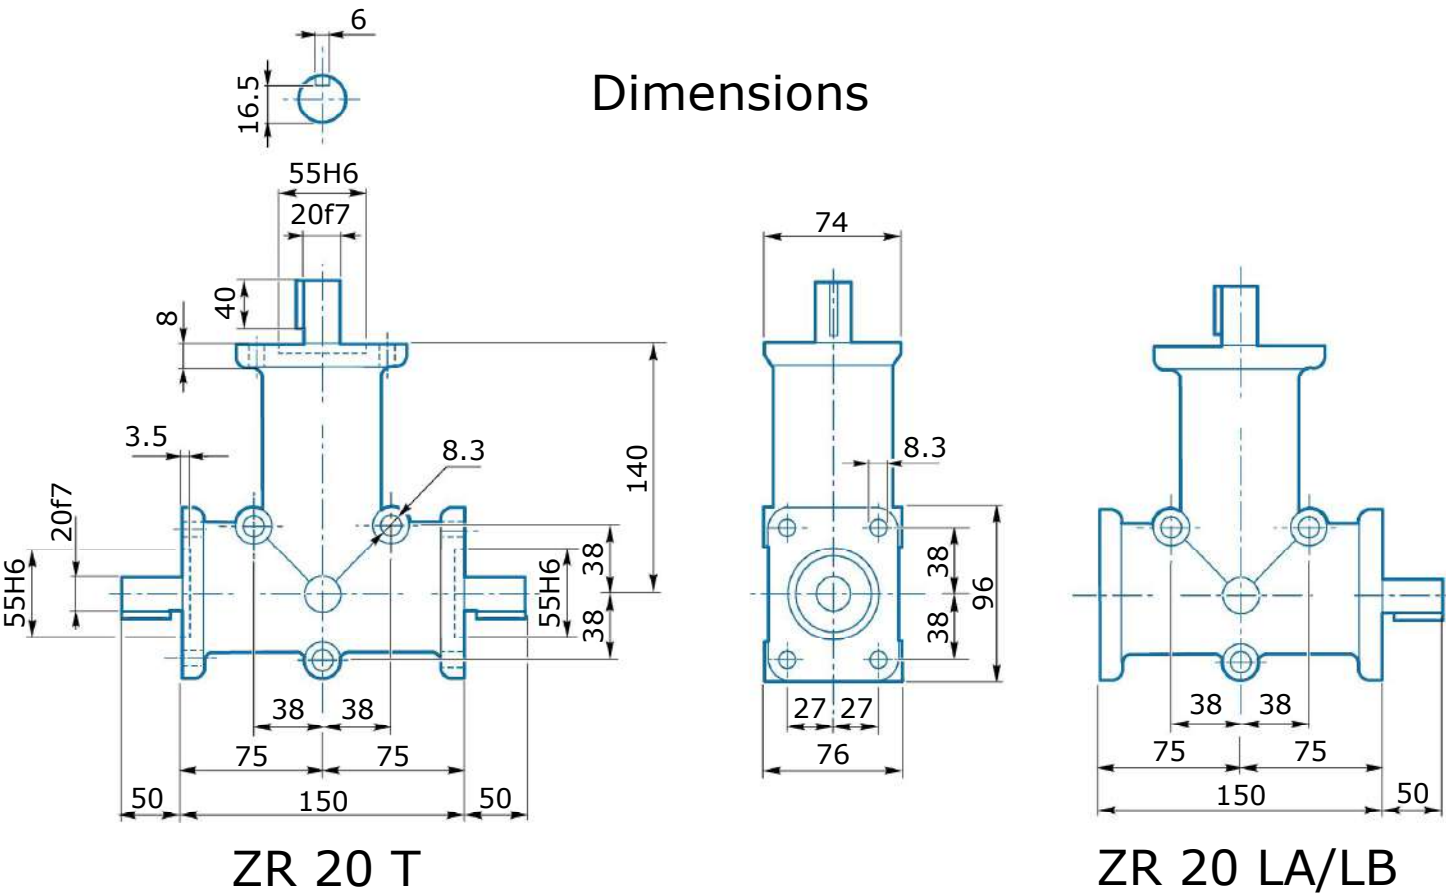

Shafts position and direction of rotation

