


# ZR 24

## Technical data

Type	i	2800 (min1)				1400 (min1)				900 (min1)				700 (min1)				RD	Kg
		Max.*		Norm.		Max.*		Norm.		Max.*		Norm.		Max.*		Norm.			
		T2m* (Nm)	P1m* (kW)	T2n (Nm)	P1n (kW)	T2m* (Nm)	P1m* (kW)	T2n (Nm)	P1n (kW)	T2m* (Nm)	P1m* (kW)	T2n (Nm)	P1n (kW)	T2m* (Nm)	P1m* (kW)	T2n (Nm)	P1n (kW)		
ZR24	1	26,0	7,9	10	3,0	29,0	4,4	15	2,2	32,0	3,1	15	1,5	29,7	2,0	15,4	1,1	0,97	5,0
	2	29,0	4,4	10	1,5	32,0	2,4	14,8	1,1	35,0	1,7	15	0,75	21	1,4	15	0,55	0,97	
	3	18,0	1,8	11	1,1	20,0	1,0	15,3	0,75	22,0	0,71	17	0,55	28	0,6	15	0,37	0,97	

Important! \* The maximum permissible values are indicated, for a quiet operating mode, with safety clutches and a soft start.

## Dimensions

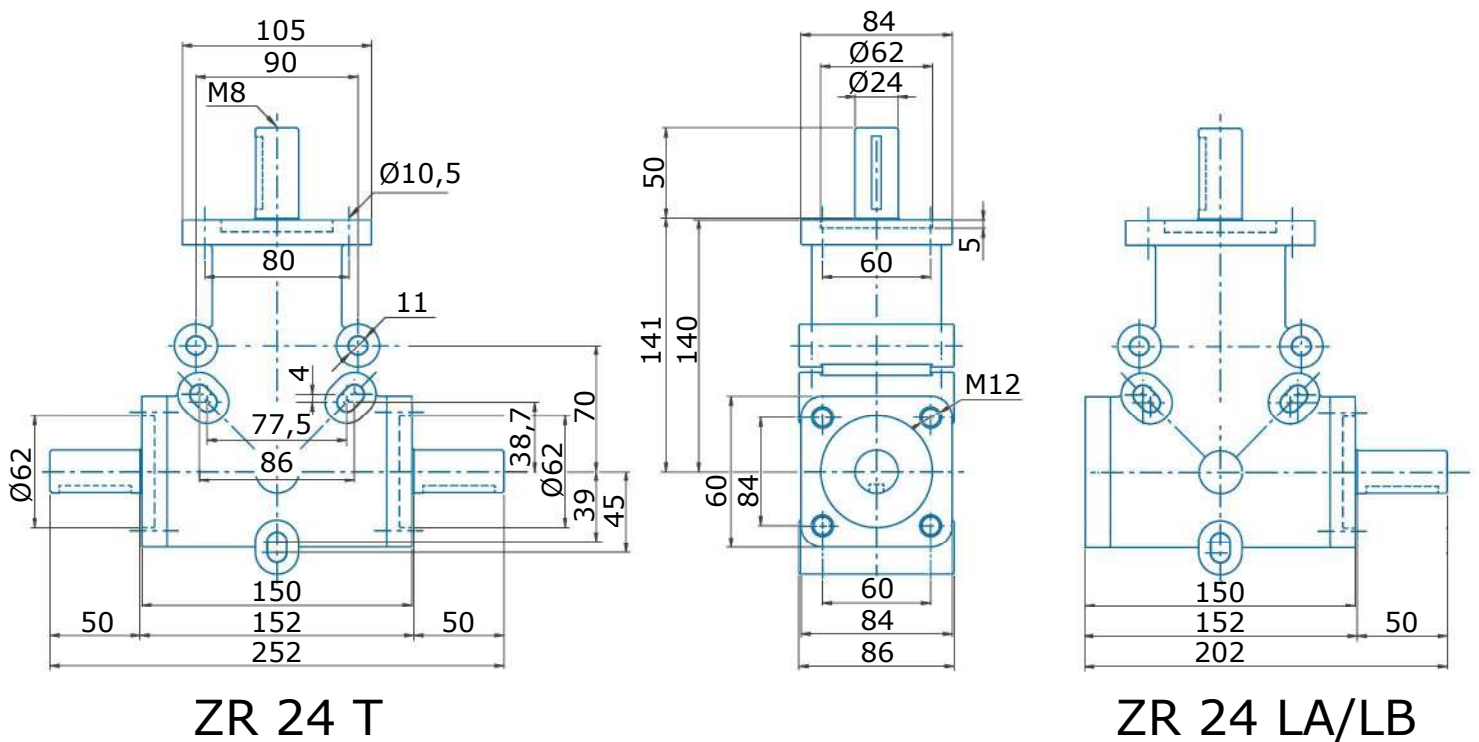

## Shafts position and direction of rotation

