


**ZR 9**

## Technical data


Type	i	2800 (min1)				1400 (min1)				900 (min1)				700 (min1)				RD	Kg		
		Max.*		Norm.		Max.*		Norm.		Max.*		Norm.		Max.*		Norm.					
		T2m*	P1m*	T2n	P1n	T2m*	P1m*	T2n	P1n	T2m*	P1m*	T2n	P1n	T2m*	P1m*	T2n	P1n				
ZR9	1	3,0	0,82	1,3	0,37	3,0	0,45	1,3	0,18	3,0	0,32	2,0	0,18	2,9	0,19	1,0	0,06	0,97	0,55		
	2	2,0	0,27	0,8	0,12	2,0	0,15	1,3	0,09	2,0	0,11	2,0	0,09	1,1	0,07	1,0	0,03	0,97			

**Important! \*** The maximum permissible values are indicated, for a quiet operating mode, with safety clutches and a soft start.

## Dimensions

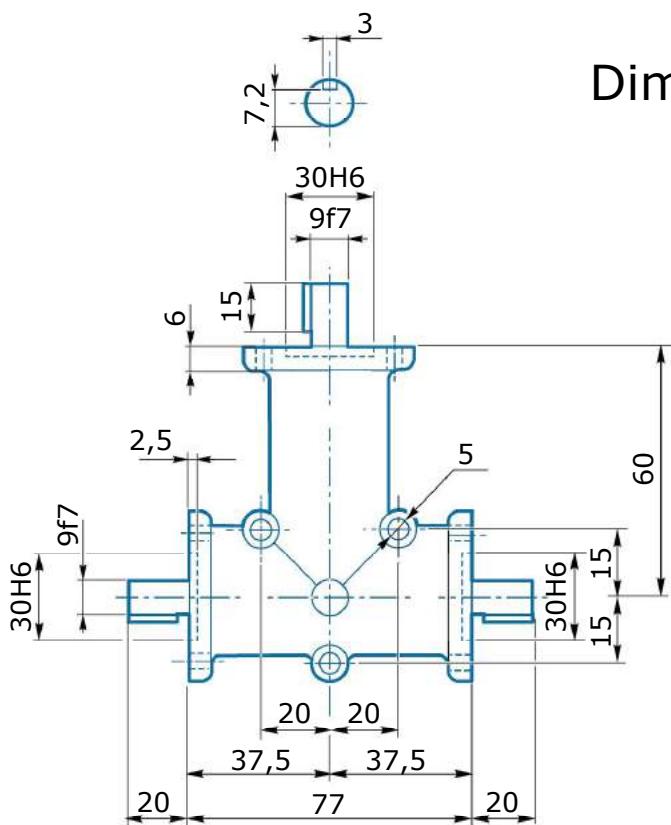


ZR 9 T

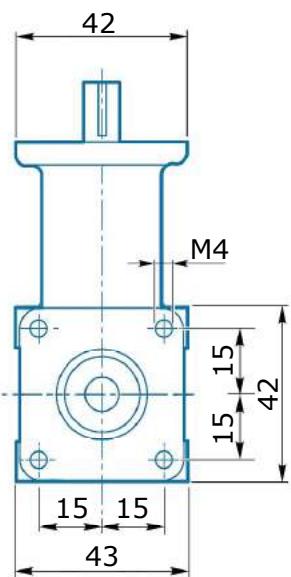


ZR 9 LA/LB


### Shafts position and direction of rotation



T



LA



LB